




MOTOPLUS[®]
PROFESSIONAL FM TRANSCEIVER

TC-200

PROFESSIONAL FM TRANSCEIVER

- 16 Programmable Channels
- Built-in CTCSS
- Low Battery Alert
- Power Save Function
- Power Output 5W
- Time out Timer

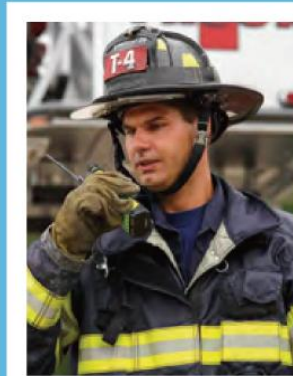



MOTOPLUS®
PROFESSIONAL FM TRANSCEIVER

TC-200

PROFESSIONAL
FM HANDHELD TRANSCEIVER



Main Features

- 16 Programmable Channels
- Built-in CTCSS
- Low Battery Alert
- Power Save Function
- Power Output 5W
- Time out Timer

SPECIFICATION

GENERAL		TRANSMIT PART	
Frequency Range	VHF:136-173.995MHz UHF:450-479.995MHz	RF Power	Lo:1W / Hi:5W
Operating Temperature	-20°C~+60°C	Modulate Mode (W/N)	F3E
Frequency Combination	phase lock loop frequency synthesize	Max. Freq. Deviation (W/N)	≤5KHz
Frequency Stability	±2.5ppm	Remain Wave Radiation	<-60dB
Memory Channel	16 Channels	Transmitting Current	≤800mA
Working voltage	DC7.4V (Li-ion Battery)	RECEIVE PART	
Antenna Impedance	50Ω	Sensitivity	<0.20μV(12dB SINAD)
Operating Mode	Simplex of co-frequency or alien frequency	Squelch Sensitivity	<0.20μV
Dimension	25.5mm×58mm×32mm without antenna	Intermodulation Antijamming	≥60dB
Weight	Approx. 380g with battery pack	Audio Power output	500mW
		Receiving Current	≤120mA
		Squelch Standby	15mA

Notice: Saving your presence, no additional notice will be sent if specification changes because of technology-improving.